

ABSOLUTE MAXIMUM RATINGS, $T_a = 25^\circ\text{C}$

FEATURES:

- Special Design Available
- Low Current Requirements
- High Light Output
- Easy Key Code

Reverse voltage per led chip.....	5.0 V
D.C Forward current per led chip.....	30 mA
Pulse current. (1.10 duty cycle , 0.1 ms pulse width) per led chip.....	100mA
Operating temperat. range.....	-25°C to + 85°C
Storage temperat. range.....	-25°C to + 100°C
Lead soldering temp.	260°C for 5 seconds

ELECTRICAL / OPTICAL CHARACTERISTICS AT $T_a = 25^\circ\text{C}$



PART NUMBER COMMON CATHODE	PART NUMBER COMMON ANODE	LED CHIP MATERIAL	LED CHIP EMITT. COLOR	SURFACE COLOR	SEGM. OR DOT COLOR	PEAK WAVE LENG. 20mA	FORWARD VOLTAGE Vf 20mA (V) SEG D.P TIP MAX	LUMIN. INTENS. 10 mA (mcd) MIN TYP
OPD 1501HR2CGW	OPD 1501HR2AGW	GaAsP GaP	HI RED	GRAY	WHITE	635	4.2 5.6	3.2 3.6
OPD 1501SR3CGW	OPD 1501SR3AGW	GaAlAs GaAs	SUPER RED	GRAY	WHITE	660	3.6 4.8	8.2 9.0
OPD 1501G1CGW	OPD 1501G1AGW	GaP	GREEN	GRAY	WHITE	570	4.2 5.6	4.5 5.5
OPD 1501O2CGW	OPD 1501O2AGW	GaAsP GaP	ORANGE	GRAY	WHITE	630	4.0 5.6	4.0 5.0

*SPECIFICATIONS ARE SUBJECT TO CHANGE


*THE PN s ABOVE MEANS STANDART VERSION, (SURFACE GRAY AND WHITE SEGMENT).

NOTE: ALL DIMENSIONS ARE IN mm, TOLERANCE IS +/-0.25mm, UNLESS OTHERWISE NOTED. THE SLOPE ANGLE OF ANY PIN MAY BE +/- 5.0 MAX.


PACKAGE DIMENSIONS AND PIN FUNCTION

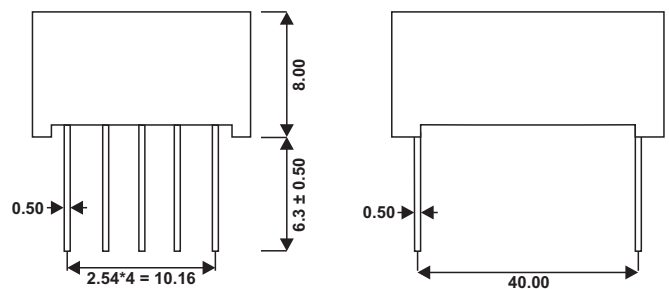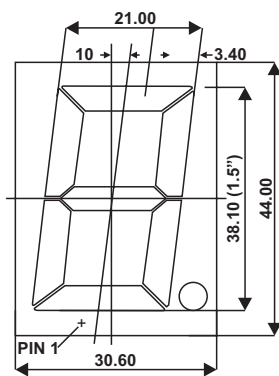

PIN CONNECTION



C.C
 1 COMMON CATHODE
 2 ANODE E
 3 ANODE D
 4 ANODE C
 5 COMMON CATHODE
 6 ANODE B
 7 ANODE A
 8 ANODE DP
 9 ANODE F
 10 ANODE G



C.A
 1 COMMON ANODE
 2 CATHODE E
 3 CATHODE D
 4 CATHODE C
 5 COMMON ANODE
 6 CATHODE B
 7 CATHODE A
 8 CATHODE DP
 9 CATHODE F
 10 CATHODE G

