

FEATURES:

- Special Design Available
- Low Current Requirements
- High Light Output
- Easy Key Code

ABSOLUTE MAXIMUM RATINGS, $T_a = 25^\circ\text{C}$

Reverse voltage per led chip.....	5.0 V
D.C Forward current per led chip	30 mA
Pulse current. (1.10 duty cycle , 0.1 ms pulse width) per led chip.....	100mA
Operating temperat. range.....	-25°C fto + 85°C
Storage temperat. range.....	-25°C to + 100°C
Lead soldering temp.	260°C for 5 seconds



ELECTRICAL / OPTICAL CHARACTERISTICS AT $T_a = 25^\circ\text{C}$

PART NUMBER	LED CHIP MATERIAL	LED CHIP EMITT. COLOR	SURFACE COLOR	SEGM. OR DOT COLOR	PEAK WAVE LENG. 20mA	FORWARD VOLTAGE Vf 20mA (V) TIP MAX	LUMIN. INTENS. 10 mA (ucd) TYP
OPB1475HR	GaP	HI RED	WHITE	WHITE	700	2.1 3.0	2200
OPB1475G	GaP	GREEN	WHITE	WHITE	567	2.2 3.0	2400
OPB1475Y	GaAsP ON GaP	YELLOW	WHITE	WHITE	585	2.1 3.0	2250
OPB1475E	GaAsP ON GaP	ORANGE	WHITE	WHITE	635	2.1 3.0	3350

*SPECIFICATIONS ARE SUBJECT TO CHANGE

NOTE: ALL DIMENSIONS ARE IN mm, TOLERANCE IS +/-0.25 mm UNLESS OTHER WISE NOTED THE SLOPE ANGLE OF ANY PIN MAY BE +/- 5.0° MAX.

PACKAGE DIMENSIONS AND PIN FUNCTION

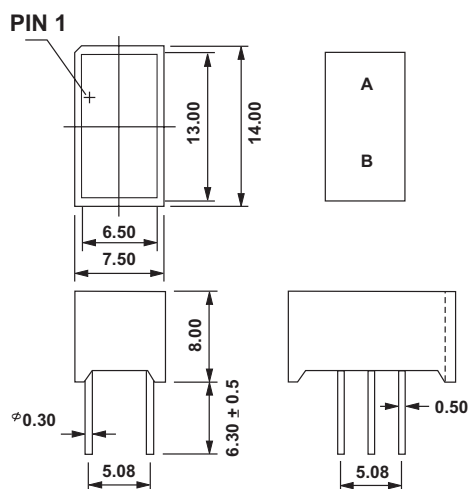

- PIN N° FUNCTION**
1. A CATHODE
 2. NO PIN
 3. B ANODE
 4. B CATHODE
 5. NO CONNECTION
 6. A ANODE