


**RG322402 320 X 240 Dots**

■ Mechanical Data		
Item	Standard Value	Unit
Module Size	72.30(W) x 92.20(H) x 7.80 (T)	mm
Viewing Area	62.20(W) x 81.40 (H)	mm
Dot Pixels	320 x 240	dots
Dot Size	0.22 x 0.22	mm
Dot Pitch	0.24 x 0.24	mm

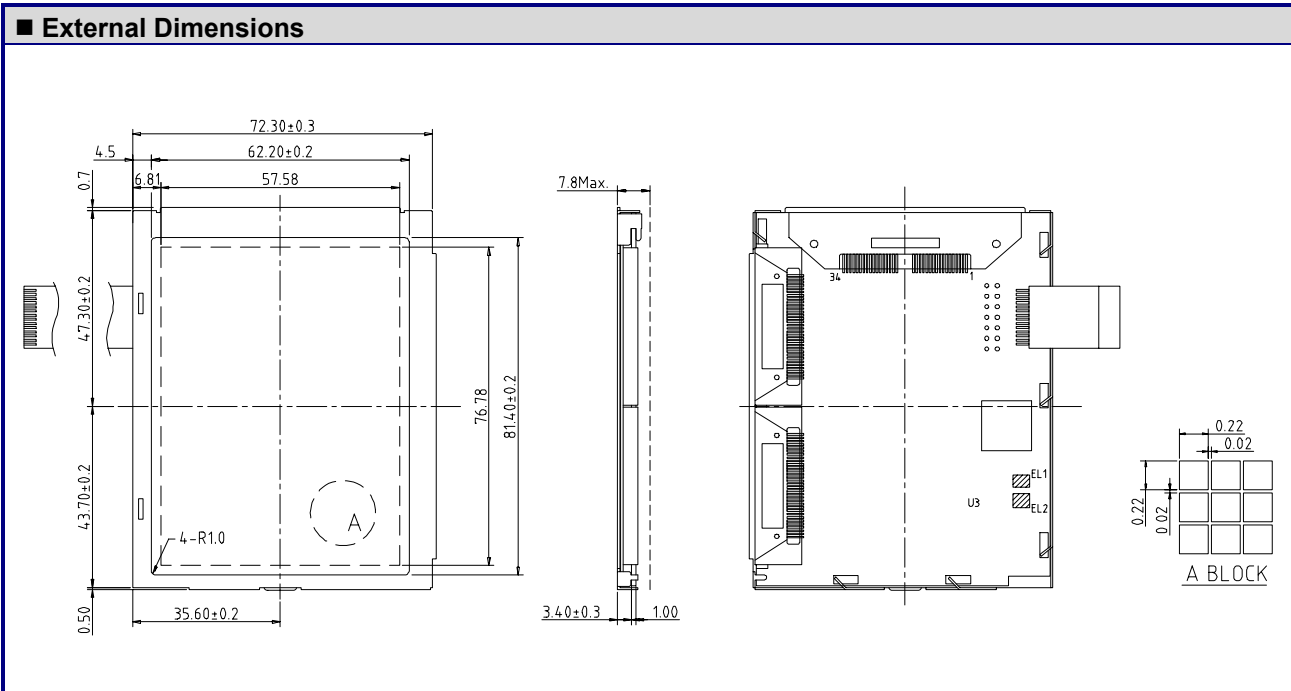

■ Pin Assignment

No.	Symbol	Level	Function
1.	CL2 (SCP)	--	Data Shift Pulse
2.	CL1 (LP)	--	Data Latch Pulse
3.	FLM	--	Scan Star-Up Signal
4.	M (N/C)	--	Frame Reverse Signal (Alternate Signal)
5 ~ 8	DB0 ~ DB3	--	Display Data Bus Line
9.	V <sub>EE</sub>	--	Power Supply for LCD (+)
10.	V <sub>DD</sub>	--	Power supply for logic
11.	V <sub>SS</sub>	--	Power supply (0V)
12.	BLE	--	H: EL Enable, L: EL Disable
13.	V <sub>ELG</sub>	--	Power Supply for EL (GND,0V)
14.	V <sub>EL</sub>	--	Power Supply for EL (+)

